




OIL STATES VR PIPELINE CONNECTOR





Horizontal Pipeline Connectors

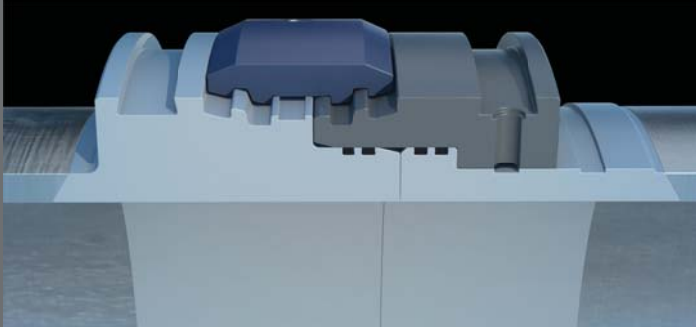


Benefits of the Oil States VR System:

- Quick make-up
- 360° rotation
- Self alignment
- No onsite welding
- Tight tolerances
- Internal sealing
- No internal offset
- Pipe or casing compatible
- CSA & ASME design standards
- Horizontal or vertical applications
- Material options available
- High abrasion overlay available

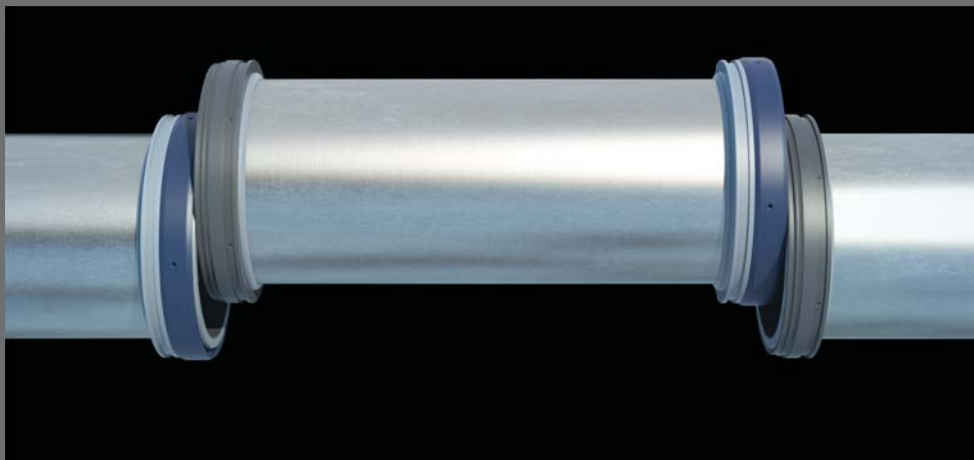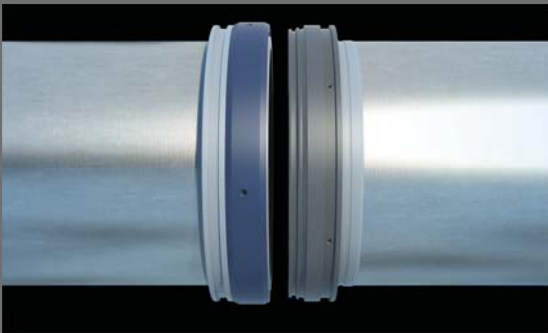


Oil States Industries, Inc.
Houston Operations

6120 E Orem Dr.
Houston, TX. 77048 USA
Ph: 1-(713) 445-2210
Fx: 1-(713) 445-2380
houstonales@oilstates.com






Replaces bolted, flange connections

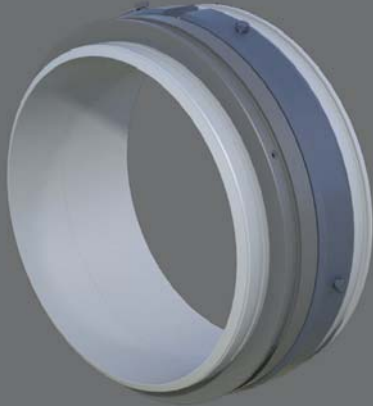


VR Connector

The Oil States VR Connector for horizontal applications where vertical removal of the pipe is needed. Quick connect technology. Make-up in just minutes.

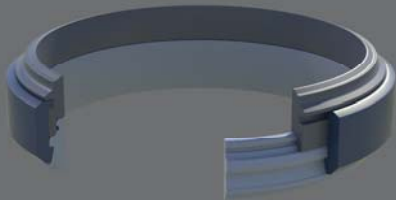

SA Connector

The Oil States SA Connector is Self-Assembling for vertical applications such as casing and conductor lines.

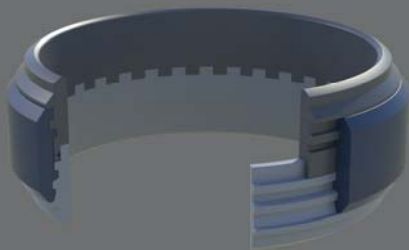


HT Connector

The Oil States HT Connector is High-Torque for vertical applications where twisting is an issue. Commonly used in directional drilling.



Oil States Industries, Inc.
Houston Operations

6120 E Orem Dr.
Houston, TX. 77048 USA
Ph: 1-(713) 445-2210
Fx: 1-(713) 445-2380
houstonales@oilstates.com





Press Release

Oil States Industries, Inc. receives CRN from ABSA for the VR Connector product line

Houston, TX. July 31, 2015: Oil States Industries, Inc., Houston Operations, has received the Canadian Registration Number (CRN OA15971.2) for the current VR Horizontal Pipeline Connector product line. The VR Connector utilizes a “quick-connect” method that permits the connection of pipelines and replacement of pipe segments where extremely tight tolerances exist and vertical removal of the pipe section may be required.

The Alberta Boilers Safety Association or ABSA reviewed all documents, calculations and design parameters of the VRC. ABSA is the certifying authority of Alberta for reviewing and approving pressure containing fittings and systems. DNV-GL witnessed the Design Qualification Testing (DQT) in Houston to verify compliance with all requirements.

Oil States will be demonstrating a full size 28” connector in Fort McMurray at the Oil Sands Show, September 15-16. The demonstration piece details a fully functioning connector and various connection methods used during installation.

Oil States Industries, Inc. is a diverse company supplying products and services to Offshore Oil & Gas, Onshore Oil & Gas, Defense and General Industry. Three business units, comprised of the Elastomer Group, the Offshore Construction Group and the Marine Pipelines Group, service these markets. Oil States is headquartered in Arlington, Texas with locations in 11 countries and more than 1700 employees. Additional information is available at www.oilstates.com.





VR Connector Design Qualification Testing Summary

ABSA Certification in Process

The Oil States VR Connector has passed Design Qualification Testing (DQT) as witnessed by DNV GL in Houston, Texas. Paperwork has now been completed and submission made to ABSA for a CRN number in Alberta Canada. The design and testing parameters were in accordance with CSA Z662 and ASME B31.3.

The new Oil States VR Pipeline Connector is designed to facilitate the rotation or removal of horizontal pipe sections where little or no tolerance exists. The connector utilizes a four piece forging design and operates much like a quick-coupling. The lock ring holds a sliding coupling in place to ensure complete double O-ring sealing. Once the lock is expanded, the sliding coupling or box can be moved back to clear the pipe. The pipe can then be lifted out for replacement or rotated in-place to maximize wear-life as required.



Items covered under the testing procedure included:

- Torsion
- Bending
- Compression
- Pressure to 1150psig
- 100 Make/Break Cycles

All items tested were passed as designed.



Oil States Industries, Inc. has been developing specialized pipeline connectors and pipeline repair systems for the oil and gas industry for over 40 years. Products are available for land based, shallow water and deepwater applications. For more information visit www.oilstates.com.

OIL STATES HOUSTON

Sales, Engineering & Manufacturing
6120 E. Orem Drive
Houston, Texas 77048 USA
Ph +1 (713) 445 2210
Fx +1 (713) 445 2380
houstonales@oilstates.com

WORLDWIDE SALES OFFICES:

Oil States Industries, Inc.
1155 Dairy Ashford, Ste. 700
Houston, Texas 77079 USA
Ph +1 (713) 510 2200
Fx +1 (713) 510 2307

Oil States Industries, (UK) Ltd.

Blackness Road
Altens Industrial Estate
Aberdeen AB12 3LH
Scotland, UK
Ph +44 (0)1224 896190
Fx +44 (0)1224 896199

Oil States Industries, Inc.

5 Allee des Mesanges
13012 Marseille,
France
Ph +33 491 95 60 51
osi-france@oilstates.com

Oil States Industries, Inc.

Lokkeveien 103
4007 Stavanger, Norway
Ph +47 400 03 707
Fx +47 515 09 640

Oil States Industries, (Nigeria) Ltd.

No. 50C Glover Road
Ikoyi, Lagos, Nigeria
Ph +234 1 2718363
Fx +234 1 2718364

Oil States Industries, Inc.

102 Bis/M Le Lai Street
District 1
Ho Chi Minh City, Vietnam
Ph +84 8 3925 3545
Fx +84 8 3925 0123

Oil States Industries, Inc.

Suite 5, 1 F Amirov Street
AZ1000 Baku, Azerbaijan
Ph +994 12 5 981 125
Fx +994 12 4 379 125

www.oilstates.com



VR Connector Data Chart

Type	Mat Yield	Pipe Nominal OD		Pipe Wall Thickness		Connector OD		Connector ID		Made-up Length		Tension Yield		Bending Yield		Compression Yield		Internal Yield Pressure		Torsion	
	(ksi)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(kips)	(MN)	(kips ft)	(MNm)	(kips)	(MN)	(psi)	(Mpa)	(kips ft)	(kNm)
SA2	100	18.625	473	0.435	11.0	21.24	540	17.76	451	5.75	146	1,350	6	516	0.7	1,688	7.5	3,000	20.7	13.0	17.6
SA2	100	20	508	0.625	15.9	22.33	567	18.75	476	6.04	154	1,527	6.8	819	1.1	2,092	9.3	3,000	20.7	15.0	20.3
SA2	100	22	559	0.625	15.9	24.33	618	20.75	527	6.04	154	1,685	7.5	1,000	1.4	2,308	10.3	3,000	20.7	15.5	21.0
SA2	100	24	610	0.75	19.1	27.50	699	22	559	9.07	230	2,555	11.4	1,729	2.3	3,757	16.7	3,000	20.7	39.0	52.9
SA2	100	24	610	1.0	25.4	27.50	699	22	559	9.07	230	2,555	11.4	1,729	2.3	3,757	16.7	3,000	20.7	39.0	52.9
SA2	100	26	660	0.75	19.1	29.50	749	24	610	9.07	230	2,777	12.4	2,049	2.8	4,084	18.2	3,000	20.7	42.0	56.9
SA2	100	26	660	1.0	25.4	29.50	749	24	610	9.07	230	2,777	12.4	2,049	2.8	4,084	18.2	3,000	20.7	42.0	56.9
SA2	100	30	762	0.75	19.1	33.50	851	28	711	9.07	230	3,222	14.3	2,770	3.8	4,738	21.1	3,000	20.7	50.0	67.8
SA2	100	30	762	1.0	25.4	33.50	851	28	711	9.07	230	3,222	14.3	2,770	3.8	4,738	21.1	3,000	10.3	50.0	67.8
SA2	100	36	914	1.0	25.4	39.50	1003	34	864	9.07	230	3,888	17.3	4,057	5.5	5,718	25.4	3,000	20.7	60.0	81.3
HD (IF)	100	20	508	1.0	25.4	22.71	577	18.00	457	10.34	263	3,104	13.8	1,170	1.6	3,104	13.8	3,000	20.7	15.0	20.3
HD (IF)	100	22	559	1.0	25.4	24.71	628	20.00	508	10.34	263	3,431	15.3	1,436	1.9	3,431	15.3	3,000	20.7	15.5	21.0
HD (IF)	100	30	762	1.0	25.4	34.10	866	27.00	686	15.38	391	6,984	31.1	3,950	5.4	6,984	31.1	3,000	10.3	50.0	67.8
HD (IF)	100	30	762	1.0	25.4	34.10	866	27.00	686	15.38	391	6,984	31.1	3,950	5.4	6,984	31.1	3,000	20.7	50.0	67.8
HD (IF)	100	36	914	1.0	25.4	41.00	1041	37.00	864	15.38	391	8,454	37.6	5,834	7.9	8,454	37.6	3,000	20.7	60.0	81.3
HD (IF)	100	36	914	1.0	25.4	40.00	1016	33.00	838	15.38	391	8,454	37.6	5,834	7.9	8,454	37.6	3,000	20.7	60.0	81.3
VRC	36	28	711	0.69	17.5	32.63	829	26.62	676	13.24	336	1,060	4.7	607	0.8	1,060	4.7	740	5.1	n/a	n/a
VRC	36	30	762	0.69	17.5	34.18	868	28.62	727	13.24	336	1,060	4.7	607	0.8	1,060	4.7	740	5.1	n/a	n/a

